



THE
LUXURY DECKING
COMPANY

THE
LUXURY DECKING
COMPANY



OUR AMBITION IS TO ACHIEVE NET ZERO CARBON EMISSIONS

To facilitate our transition to net zero carbon neutrality, at Luxury Decking, we have placed the lifecycle of each board under the microscope. Our target of establishing environmentally friendly operations throughout manufacturing, logistics and supply is becoming increasingly close.

All our luxurious decking is created using 82% recycled material with sustainably harvested ingredients such as wood flour being at the very core of our manufacturing process.

THE
LUXURY DECKING
COMPANY

MAIN PRODUCTS

Decking profiles

Ultra	8
Vintage	10
Mogano.....	12
Elite	14

Step profiles

Scala	19
-------------	----

Installation Guides

Decking	22
Step	23


EXTRA

Accessories	24
-------------------	----



INTRODUCTION

The Luxury Decking Company combines the natural beauty of real wood with the high performance of eco friendly composite decking, a material widely recognized for its strength. 82% of the composition is recycled material, saving these materials from landfill, giving them value and recycling them into a long life product, provides a harmonious solution to sustainable living. Luxury Decking maintains a functional and highly attractive deck for years to come.

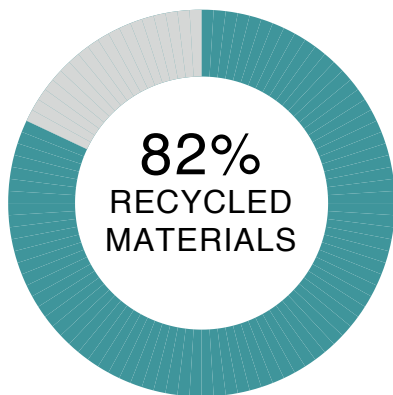




DECKING PROFILES

ULTRA COLLECTION

Ultra **Graphite**



Ultra **Grey**

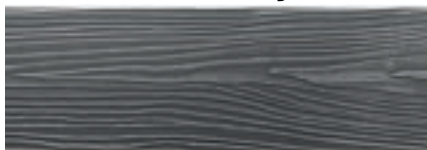

Ultra **Walnut**



Ultra **Wenge**



Ultra **Palisander**




Wenge colour

WOOD SIDE



RIBS SIDE

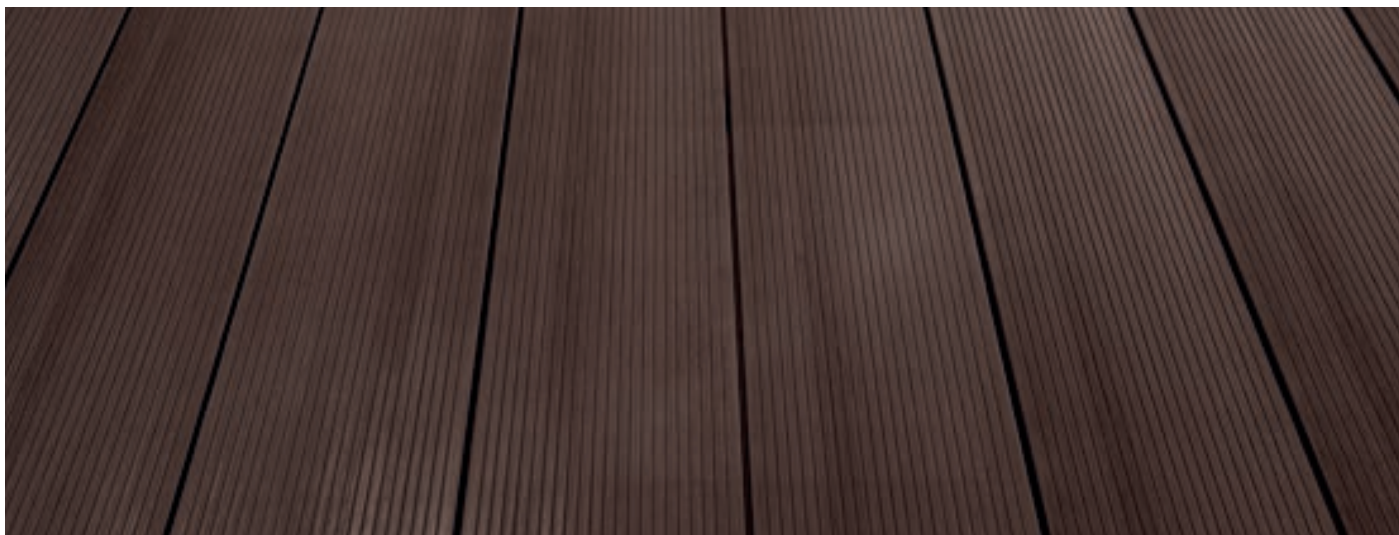


VINTAGE COLLECTION

Vintage **Graphite**



Vintage **Grey**

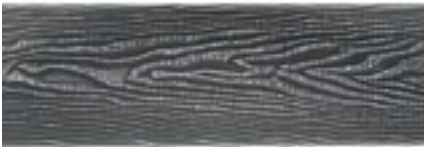

Vintage **Walnut**



Vintage **Wenge**



Vintage **Palisander**



Palisander colour

VINTAGE SIDE



OLD WOOD SIDE




MOGANO COLLECTION

Mogano **Graphite**



Mogano **Grey**

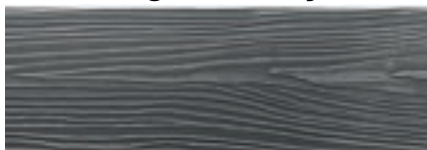


Mogano **Walnut**



Mogano **Wenge**



Mogano **Palisander**

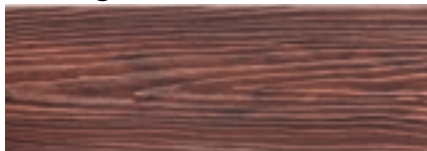

Walnut colour

WOOD SIDE



RIBS SIDE




ELITE COLLECTION

Elite **Graphite**



Elite **Grey**

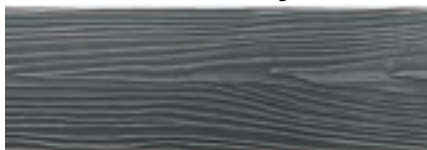

Elite **Walnut**



Elite **Wenge**



Elite **Palisander**




Graphite colour

CLASSIC WOOD SIDE




RIBS SIDE

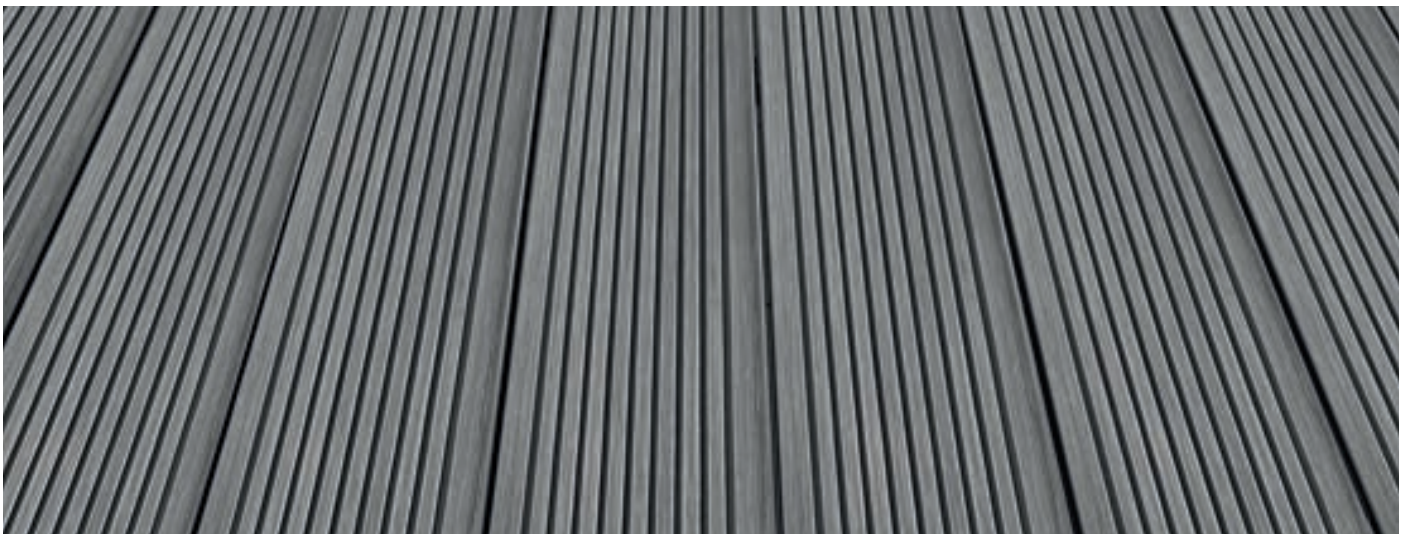

PORTFOLIO




PORTFOLIO

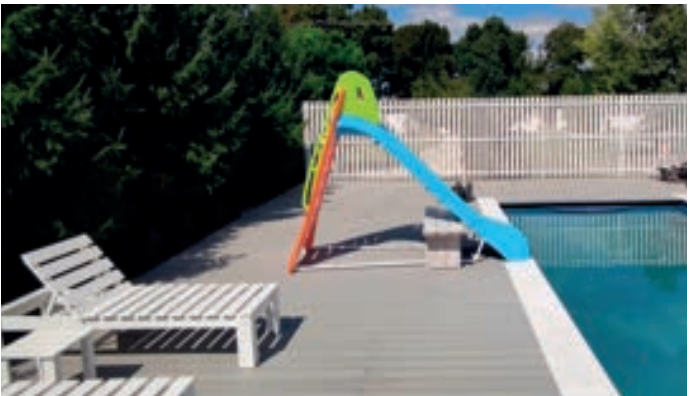


DECKING PROFILES / INFORMATION




Ultra



Vintage



Mogano



Elite

Size:
150 mm x 24 mm

Size:
150 mm x 24 mm

Size:
165 mm x 24 mm

Size:
154 mm x 20 mm

Length
3000 mm

Length
3000 mm

Length
3000 mm

Length
3000 mm

Weight
2.4 kg / lm

Weight
2.4 kg / lm

Weight
2.95 kg / lm

Weight
3.65 kg / lm




STEP PROFILES

SCALA STEP COLLECTION


Scala **Graphite**



Scala **Grey**

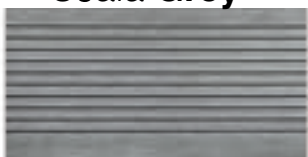

Scala **Walnut**

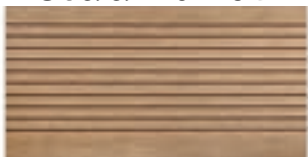

Scala **Wenge**



Scala **Palisander**



Wenge color

STEP / INFORMATION



Scala

Size:

345 mm x 23 mm

Length:


3000 mm

Weight:

7.6 kg / lm

DECKING INSTALLATION GUIDE

Luxury Decking can be sawed, milled or drilled with all the usual woodworking tools.
Installation must be carried out at a temperature above 5 degrees Celsius

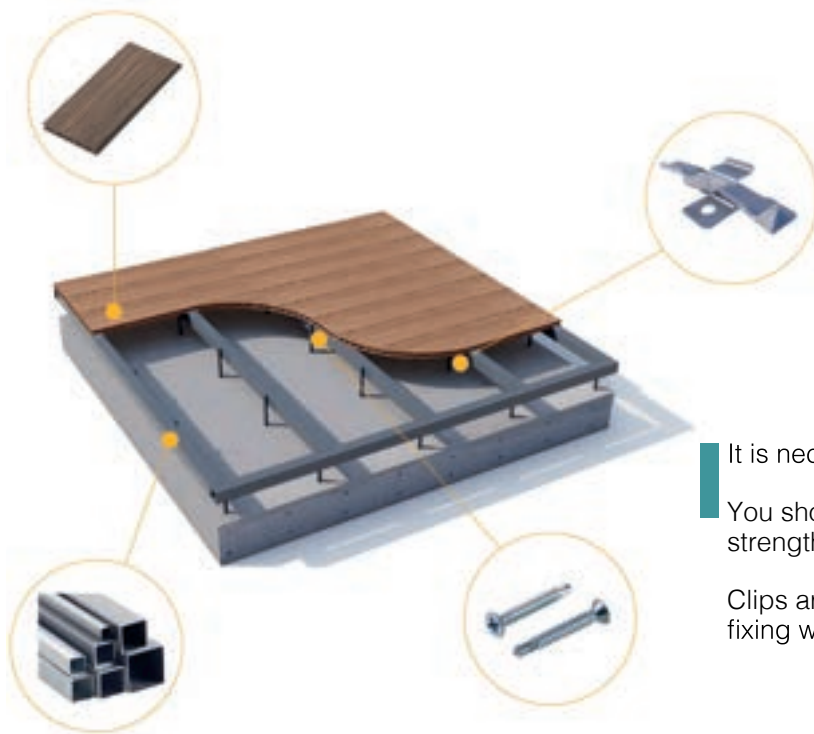

Luxury Decking must be fastened by clips to each reference joist.

With a small length of the decking, it is necessary to mount it at 3 points (on 3 support joists).

It is necessary to fix clips, holding a seam width of 3 mm.


You should provide the necessary clearance to further strengthen each subsequent Luxury Decking board.

Clips are tightly inserted under the board, lifting it before fixing with screws.

Installation of Aluminum joist is carried out on a solid and flat concrete screed with a slope of 1.5-2% or on a metal frame with a cross section of 60x40 cm and a distance between the profile of 1000 mm, with a beam pitch of no more than 400 mm for a hollow decking and no more than 360 mm for a full-body profile

STEP INSTALLATION GUIDE

Mounting joists should be installed perpendicular to the profile of the stage with a step of no more than 400 mm. The steps should be mounted on flat concrete with a slope of no more than 1% for water flow.

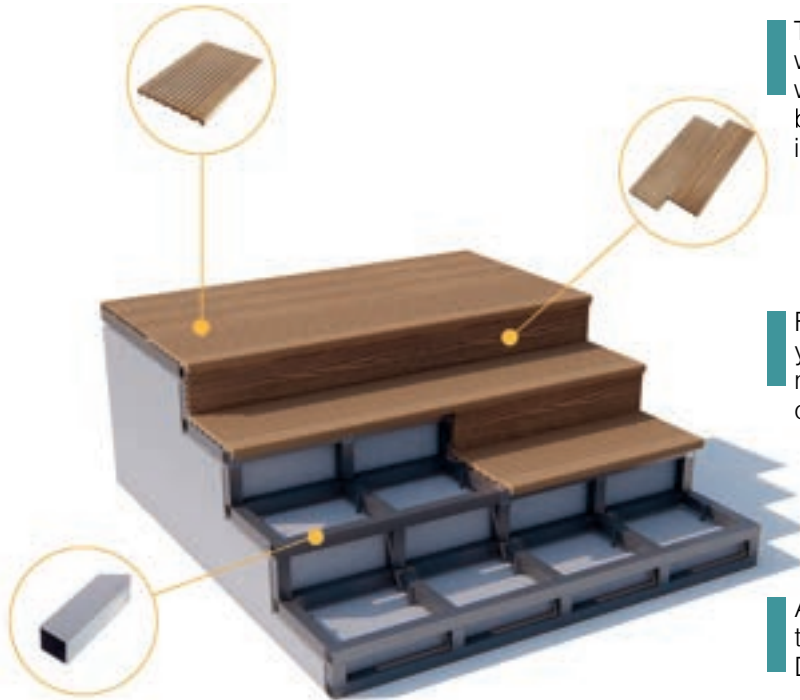

The steps are attached to the frame with a mounting angle on a metal or wooden frame and the distance between the profile of the frame is not more than 400 mm

For concealed mounting of the steps you should attach a perforated corner made of galvanized steel to the bottom of the step using self-tapping screws

Attach the riser to the joists with self-tapping screws. For the riser, use Luxury Decking boards.


The joists should be laid perpendicular to the profile of the step and attached to the base with dowel nails. The diameter and length of the dowel nails are selected depending on the base material.





ACCESSORIES

Accessories

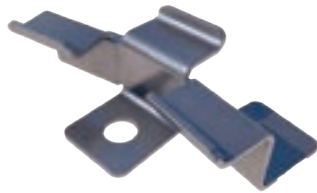

Luxury Decking clip
Stainless Steel



Luxury Decking starter clip
Stainless Steel



Steel joist
40 mm x 60 mm



Steel joist
50 mm x 20 mm




Steel joist
28 mm x 40 mm



Decorative corner
70 mm x 35 mm



Decorative corner
50 mm x 50 mm



Rubber pad for joists
Резина 60 mm x 80 mm x 6 mm



Adjustable support



THE
LUXURY DECKING
COMPANY

www.luxurydecking.co.uk

Phone: 01977 350330

Address: Unit 28, Normanton Business Park,
Ripley Drive, Normanton, West Yorkshire, WF6 1QT